


LEGOPAN

Lego U 0,19 W/m2K
Lego +P U 0,15 W/m2K

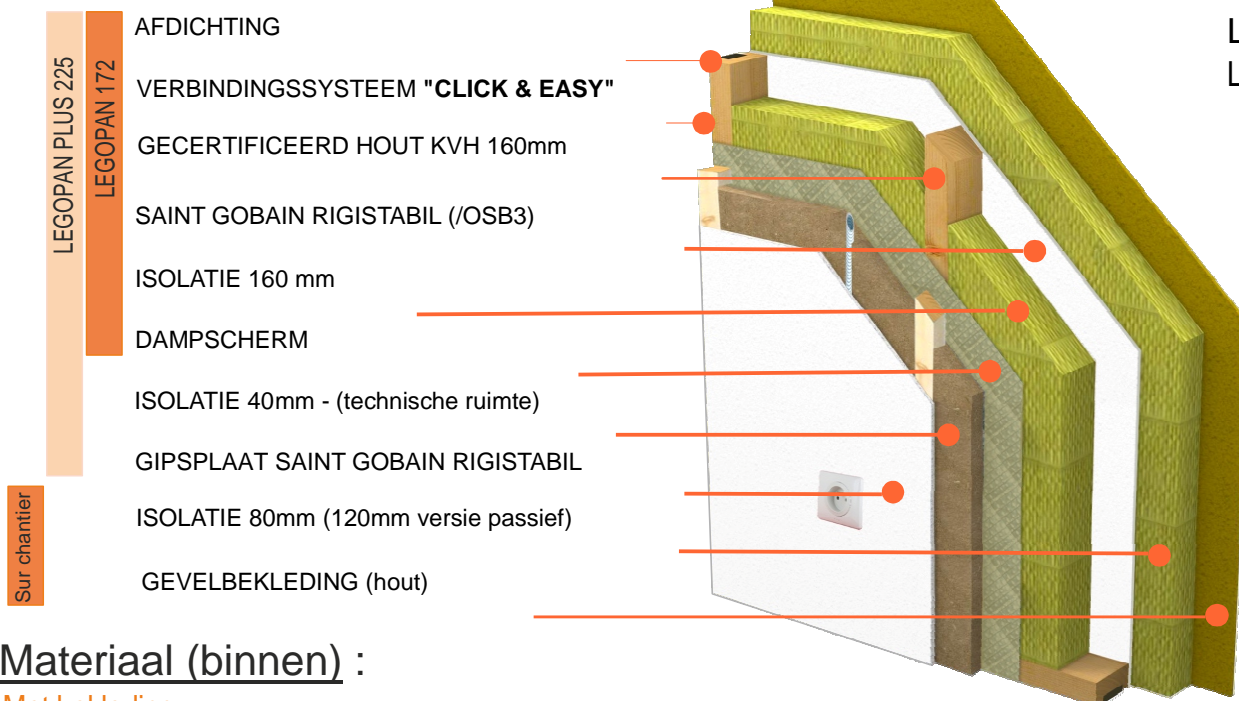

Materiaal (binnen) :

Met bekleding

Nom	D(m)	L(W/mK)	C(J/kgK)	Ro(kg/m3)	MI	Ma(Kg/m²)
Rigistabil (gips)	0.0125	0.1420	1030	840	12.7	0.000
Isover AKU (isolatie)	0.0400	0.0470	800	50	1.0	0.000
Isover Vario (ademende film)	0.0002	0.3500	1470.0	60	22727.0	0.000
Isover AKU (isolatie)	0.1600	0.0480	800	50	1.0	0.000
Rigistabil (OSB)	0.0125	0.1420	1030	840	12.7	0.000
Tegellijm	0.0020	0.8700	840	1850	20.0	0.000
Isover TF	0.0800	0.0360	800	154.9	1.0	0.000
Kleefstof bekleding	0.0020	0.8700	840	1850	20	0.000
Bekleding	0.0070	0.8000	1000	800	60.0	0.000

Met Beschermkap

Rigistabil (gips)	0.0125	0.1420	1030	840	12.7	0.000
Isover AKU (isolatie)	0.0400	0.0470	800	50	1.0	0.000
Isover Vario (ademende film)	0.0002	0.3500	1470.0	60	22727.0	0.000
Isover AKU (isolatie)	0.1600	0.0480	800	50	1.0	0.000
Rigistabil (OSB)	0.0125	0.1420	1030	840	12.7	0.000
Isover AKU	0.8000	0.0440	800	50	1.0	0.000
Isocell Omerga	0.0006	0.3500	1500	233	33.0	0.000